
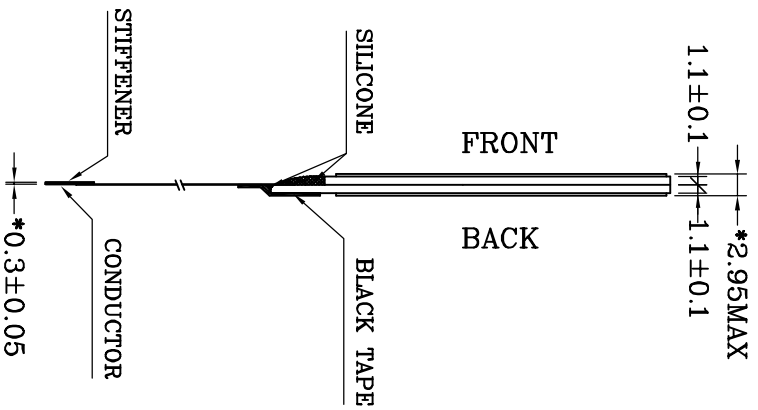


Signature: _____

Date: _____

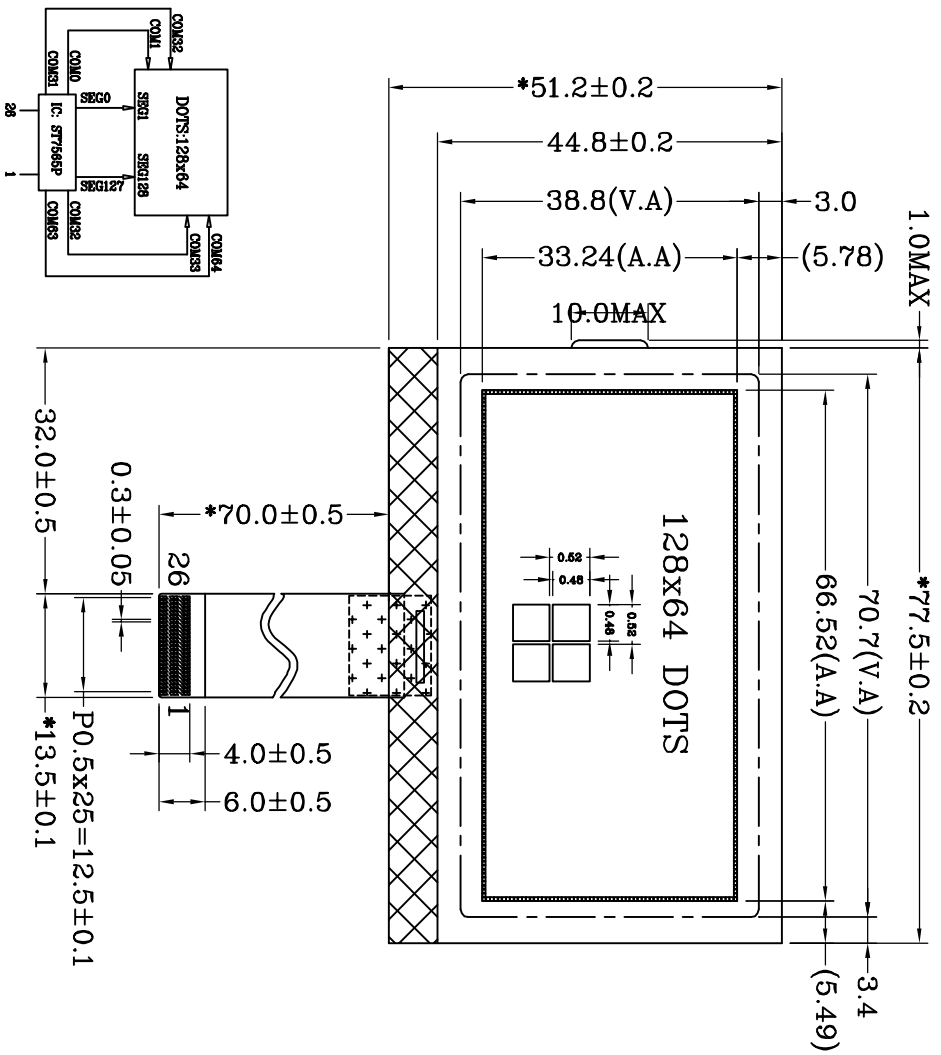

NO.	PIN
1	/CS1
2	/RES
3	A0
4	WR
5	RD
6	D0
7	D1
8	D2
9	D3
10	D4
11	D5
12	D6(SCL)
13	D7(SI)
14	VDD
15	VSS
16	VOU ^T
17	CAP3-
18	CAP1+
19	CAP1-
20	CAP2-
21	CAP2+
22	V1
23	V2
24	V3
25	V4
26	V5

Specifications:

1. Display Mode: STN(Blue)/Transmissive/Negative.
2. Viewing Angle: 6 0'clock.
3. Drive Method: 1/65 Duty, 1/9 Bias, Vop=9.0V, Vdd=3.0V.
4. Top: -20°C~+60°C, Tst: -30°C~+70°C.
5. Connector: COG+FPIC.
6. Backlight: NO.
7. Drive IC: ST75665P.
8. RoHS Compliant: Yes.
9. Mark with "*" is very important dimension; Need customer to double check.