

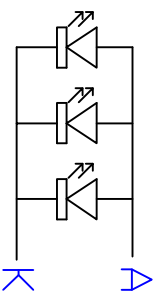


PIN	SYMBOL
1	NC
2	CS#P
3	RS#P
4	ADP
5	RMP
6	RMP
7	ED0
8	ED1
9	ED2
10	ED3
11	ED4
12	ED5
13	ED6
14	ED7
15	VDD
16	VSS
17	WDT
18	CP#P
19	CP#N
20	CP#P
21	CP#P
22	CP#N
23	V4
24	V3
25	V2
26	V1
27	VO
28	COMP
29	PSSP
30	NC

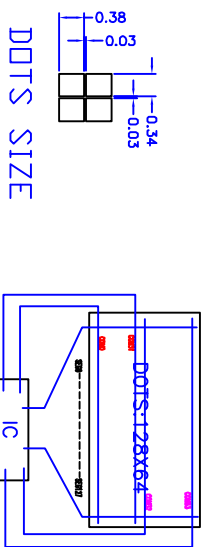


Backlight Circuit

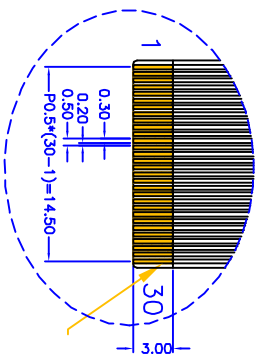


镜像后露铜接触面

- Specifications:
- 1) LCD Display Type : FSTN,Positive,
 - 2) Polarizer : Transflective
 - 3) Viewing Direction : 6 O'CLOCK
 - 4) Drive Method : 1/64Duty, 1/9Bias
 - 5) Operating Voltage : VDD=3.3
 - 6) Operating Temperature : -20°C~70°C
 - 7) Storage Temperature : -30°C~80°C
 - 8) Controller/Driver IC : ST7565
 - 9) Backlight : White LED, 30mA~40mA

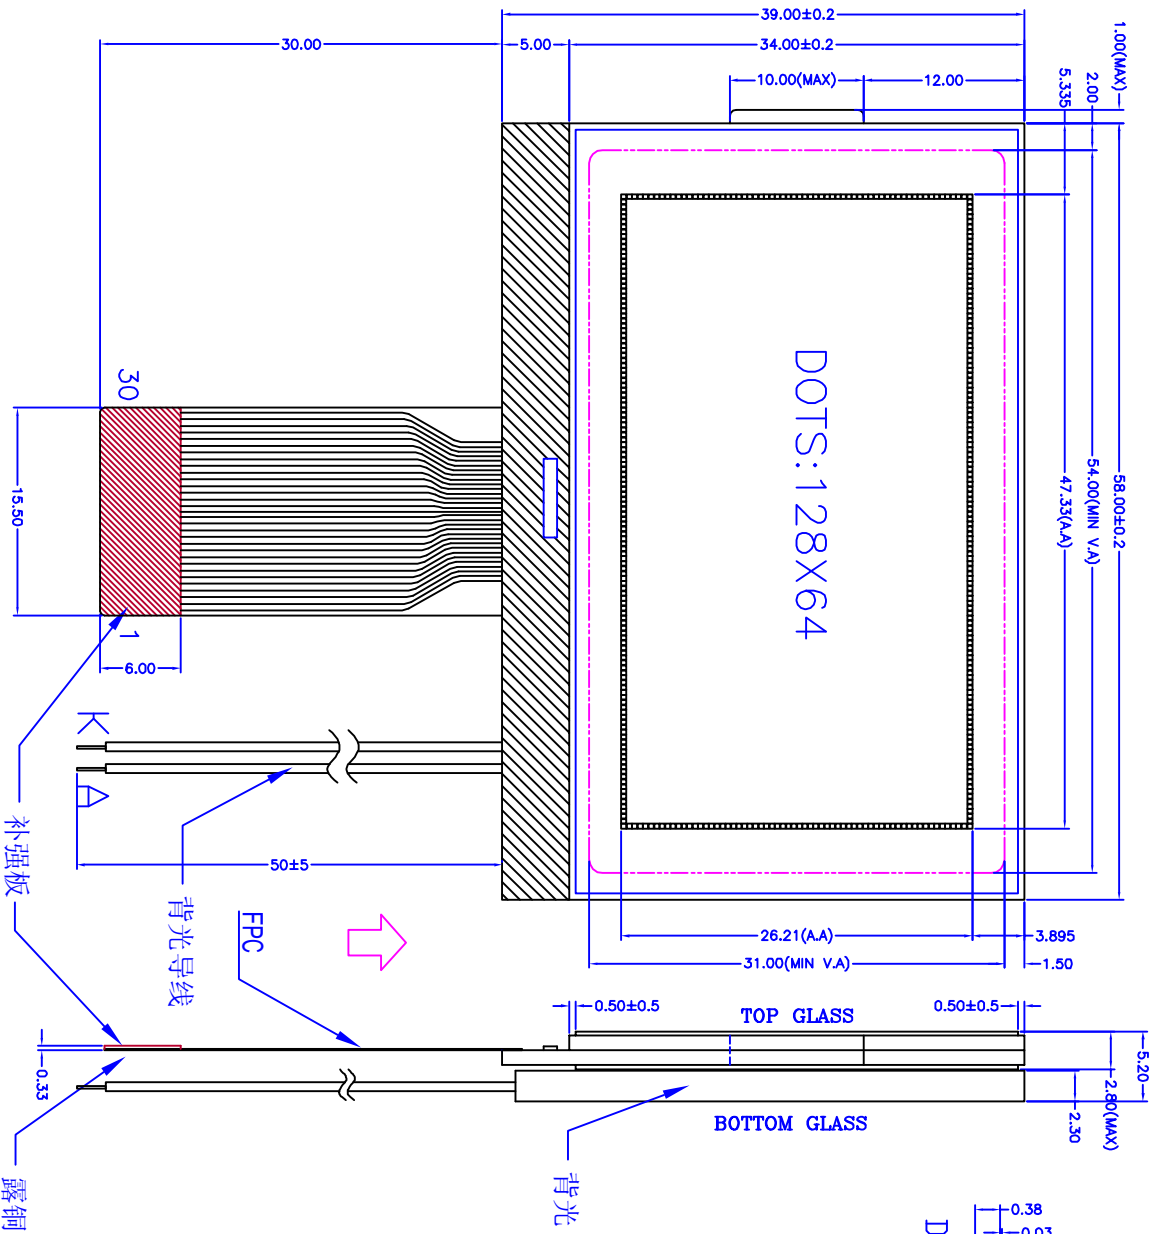

Customers Approval With Signature And Chop
Approved By _____ Date _____



Dwg Title	T12864C432			REV	00
Scale	Unit	Tol.	Dwg No.		
	mm	±0.2	05161830		
Drawn	Checked	Approved	Date		
LMX			2012-05-16		