


PIN	SYMBOL	PIN	SYMBOL
1	NC	19	CAP3+
2	NC	20	CAP1-
3	/CS1	21	CAP1+
4	/RES	22	CAP2+
5	/A0	23	CAP2-
6	/WR	24	NC
7	/RD	25	V1
8	DB0	26	V2
9	DB1	27	V3
10	DB2	28	V4
11	DB3	29	V0
12	DB4	30	VR
13	DB5	31	NC
14	DB6	32	C86
15	DB7	33	PS
16	VDD	34	NC
17	VSS	35	IRS
18	VOUT	36	NC

**NOTES:**

1. DISPLAY TYPE: FSTN/POSITIVE
2. OPERATING VOLTAGE: 3.3V
3. OPERATING TEMPERATURE: -20°C~70°C
4. STORAGE TEMPERATURE: -30°C~80°C
5. DRIVE MODE: 1/64D, 1/9B
6. VIEWING DIRECTION: 6:00
7. POLARIZER TYPE: TRANSMISSIVE
8. CONNECTOR: COG/ST7565
9. CUSTOMER No.:
10. Backlight: White LED (If=25mA±5 TYP, Vf=3.0V ±0.2)

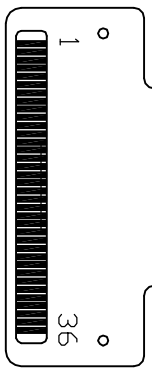

Dwg Title	<b>T12864C002B</b>			REV	01
Scale	Unit	Tol.	Dwg No.	Date	
	mm	±0.5	1202151405	2012-02-15	
Drawn	Checked	Approved	Date		
Lmx			2012-02-15		